



C

40Gb/s

10Gb/s

DWDM

I²C RS232
(90 x 70 x 16 mm)

40&100Gb/s
10Gb/s


Telcordia GR-1312-CORE
RoHS

100G TDCM

	1527.216		1565.496	nm
	01200			ps/nm

	$\hat{O}$ 700ps/nm	-25	$\acute{O}$ 20	25	ps/nm
	700ps/nm< $\hat{O}$ 1200ps/nm	-60	$\acute{O}$ 30	60	
	120ps/nm< $\hat{O}$ 1700ps/nm	-90		90	
	1700ps/nm< $\hat{O}$ 2000ps/nm	-90		90	
			10	15	ps
			4	5.5	dB
Ripple			0.3	1	dB
				1	dB
		45	50		dB
			15	30	s
			0.1	0.2	dB
				1	ps
				27	dBm
			4	7.5	W
				180	s

TDCM- □-□-□-□-□-□

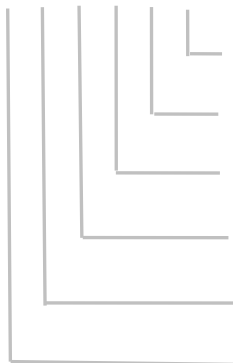

- Connector FC,SC,LC,MU/PC,UPC,APC
- Fiber length 1:1.0 Customer specify
- Fiber Dia.:09: $\varnothing$ 0.9mm025: $\varnothing$ 0.25mm
- Dispersion 1200: $\pm$ 1200ps/nm
- Channel 1:100G, 3:50G
- Operation wavelength C C band