


C244B

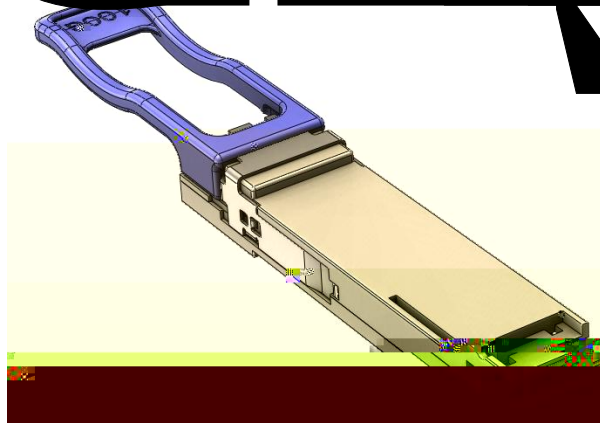

100G QSFP28 CWDM4

2km
DFB

4 PIN

4 TIA

LC

. C m3
QSFP+

			Min	Typ	Max
	Tx				
Center wavelength			1264.5		1277.5
			1284.5		1297.5
	nm		1304.5		1317.5
			1324.5		1337.5
Signaling rate, per lane	Gbit/s		25.78125	±100	ppm
Operating link reach	km		0.002		2
Optical modulation amplitude, per lane	OMA	dBm	-4		2.5
Transmitter and dimmer (#)	mm (#)	mm (#)			

