


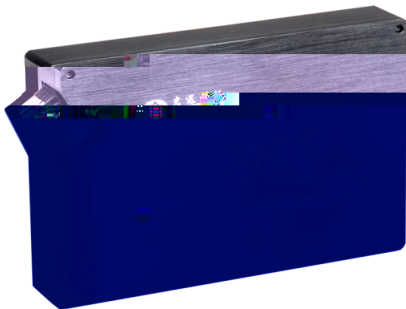


PLC MEMS MCS ROADM
ROADM N
M

DWDM
ROADM

Telcordia GR-1221-CORE
RoHS

		8x12			8x16		
	nm	1525		1570	1525		1570
	dB		13.5	14.5		15	16
	dB			1.2			1.5
	dB		0.5	0.7		0.5	0.7
	dB			0.5			0.5
	ps			0.5			0.5
	dB	40	45		40	45	
	dB	40			40		

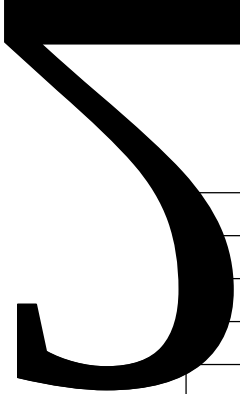

	dB	40			40		
	dB	45			45		
	ms			50			50
	dBm			25			25
	W			5			5
		-5~65			-5~65		
		-40~85			-40~85		
	mm	220x140x20.5			220x140x20.5		

MCS- □-□-□-□-□-□

Customer Specify 1: One function module, 2: Twin function module

Package A: 220x140x35, B: 220x140x20.5

Connector LC/UPC, LC/APC, MPO, customer specify

Fiber Type 0254Φ00 B $\bar{G}$ ⋈ ♂

